


OMEGA INVERTER TECHNOLOGY

INVERTER
TECHNOLOGY
EXPERT

Engineered to elevate efficiency and comfort
..... to the next level!!

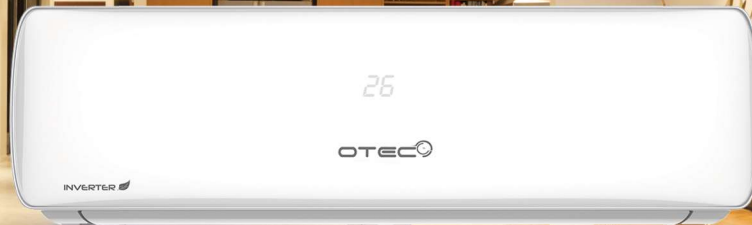

IEWH-ICHH SERIES High Wall Air Conditioner 50 Hz Inverter Split Heat Pump Unit

Cooling Nominal: 9,000 ~ 24,000 BTU/h (2.2~7.1 kW)
Cooling Range: 3,400 ~ 24,000 BTU/h (0.4~7.1 kW)
Heating Nominal: 9,500 ~ 24,500 BTU/h (2.7~7.2 kW)
Heating Range: 3,000 ~ 24,500 BTU/h (0.8~7.2 kW)

Product Features

- ✓ Up to 18 SEER in Cooling Mode.
- ✓ Cooling down to 3,400 BTU/h.
- ✓ Auto Restart.
- ✓ Latest Technologies Inverter Control.
- ✓ Self-Diagnosis.
- ✓ Gold Fin Technology
- ✓ Low Voltage Start Up.
- ✓ LED Backlight.
- ✓ R410A Refrigerant.
- ✓ Soft Start.

Indoor Unit Features

- ✓ Super Quiet.
- ✓ Wireless LCD Remote Control.
- ✓ Auto Setting for Cooling, Dehumidifying, Fan.
- ✓ Sleep Mode.
- ✓ Auto Swing (Louver).
- ✓ Turbo Cooling Function.
- ✓ Self-Cleaning Gold Fin Technology
- ✓ Washable High Density Filter.
- ✓ 2 Meters Drain Hose.
- ✓ 2 Ways Drain Connection (Left & Right).
- ✓ Removable & Washable Panel.
- ✓ Multi-Functional 3-1 Filter (Opt.)
- ✓ Ionzer (Opt.)
- ✓ Wifi-Ready (Opt.)

Outdoor Unit Features

- ✓ DC Inverter Rotary Compressor.
- ✓ Designed for Cooling up to 110F ° ambient.
- ✓ Super Quiet Operation.
- ✓ High Efficiency Coils with cooper tubes/Aluminum Fins.
- ✓ Corrosion resisting cabinet with Protective Coating.
- ✓ Soft Start for all Models.
- ✓ Groved Copper Tubes.
- ✓ Compressor Overload Protection.
- ✓ Over Current Protection.
- ✓ Discharge High Temperature Protection.
- ✓ Time Delay Protection.
- ✓ Low Voltage Startup.
- ✓ 3 Meters Cu/Cu Insulated Pipe Kit.
- ✓ 3.5 Meters Connecting Cable.



OMEGA

INVERTER

ISO 14001 ISO 9001

A Product of
OMEGA
Environmental
Technologies LLC.
www.otecomega.com

OMEGA INVERTER TECHNOLOGY

INVERTER
TECHNOLOGY
EXPERT

Engineered to elevate efficiency and comfort
..... to the next level!

INDOOR UNIT

MODEL NO.	IEWH	009J 3A-CWJ022	012J 3A-CWJ036	018J 3A-CWJ056	024J 3A-CWJ071
Cooling Capacity	Nominal	9,000 (2.2)	12,000 (3.6)	18,000 (5.6)	24,000 (7.1)
BTU/h (kW)	Minimum	3,400 (0.9)	3,450 (1.0)	4,260 (1.2)	4,800 (1.4)
Efficiency	SEER	11,300 (3.3)	12,800 (3.7)	19,800 (5.8)	26,000 (7.6)
Heating Capacity	Nominal	9,500 (2.7)	12,500 (3.7)	18,500 (5.7)	24,500 (7.2)
BTU/h (kW)	Minimum	3,000 (0.8)	3,800 (1.1)	6,200 (1.8)	8,500 (2.5)
Efficiency	Maximum	11,500 (3.4)	13,500 (4.0)	19,000 (5.6)	24,500 (7.1)
	COP (W/W)	3.61	3.62	3.64	3.65
Refrigerant Control		Capillary Tube			
Fan	Type	Cross-Flow Fan			
	Speed	4			
	Air Flow CFM (m³/hr) - Hi	295 (500)	324 (550)	482 (820)	706 (1200)
	Noise Level (dbA) Hi/Lo	40/34	42/36	44/35	46/37
	Motor (W)	30	35	60	110
Coil Type:		Grooved Copper Tubes - Aluminum Slit Fin			
Air Filter		Cleanable Cartridge Type			
Electrical	Voltage	220~240V - 1Ph @ 50Hz			
	Range	min 187~max 253			
	FLA	0.14	0.16	0.27	0.50
Controls		LCD Wireless Remote Control			
Refrigerant Connections inches (mm)		See Outdoor Unit Data			
Drain Connections inches (mm)		1/2 (12)			
Dimensions inches (mm)	Height	7 3/4 (196)	7 7/8 (200)	8 5/8 (220)	12 1/2 (320)
	Width	28 3/8 (720)	31 1/8 (790)	35 1/2 (900)	40 3/8 (1025)
	Depth	10 5/8 (270)	10 5/8 (270)	11 1/2 (291)	9 1/4 (235)
Net Weight	lbs (kgs)	15.4 (7)	17.6 (8)	22 (10)	28.6 (13)

OUTDOOR UNIT


MODEL NO.	ICHH	009J 3A-CWJ022	012J 3A-CWJ036	018J 3A-CWJ056	024J 3A-CWJ071
Compressor Type		Rotary			
Outdoor Fan	No of Fans	1	1	1	1
	Noise Level (dbA)	50	50	54	55
Coil Type:		Grooved Copper Tubes - Aluminum Slit Fin			
Electrical	Voltage	220~240-1Ph @ 50Hz			
	Range (min-max)	min 187~max 253			
	Compressor (RLA)	3.8	5.3	6.82	7.3
	Cooling Pwr. Input Nom. (W)	821	1095	1633	2170
	Min. Circuit Amps (MCA)	4.89	6.78	8.80	9.6
	Max Fuse Amps (MOCP)	6	10	15	15
Refrigerant R410A (oz./kgs.)		21.5 / 0.61	24.7 / 0.7	32.8 / 0.93	51.1 / 1.45
Refrigerant Connections inches (mm)	Type	Flare			
	Liquid	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Suction	3/8 (9.52)	3/8 (9.52)	1/2 (12.7)	5/8 (15.9)
Max Pipe Distance ft. (m)	Height	33 (10)			
	Length	66 (20)		82 (25)	
Dimensions inches (mm)	Height	20 7/8 (530)	20 7/8 (530)	22 (560)	25 (635)
	Width	26 (660)	26 (660)	30 3/4 (780)	32 1/4 (820)
	Depth	9 8/7 (250)	9 8/7 (250)	10 5/8 (270)	12 1/4 (310)
Net Weight	lbs (kgs)	48.4 (22)	52.8 (24)	63.8 (29)	77 (35)

IEWH-ICHH SERIES High Wall Air Conditioner 50 Hz Inverter Split Heat Pump Unit

Cooling Nominal: 9,000 ~ 24,000 BTU/h (2.2~7.1 kW)
Cooling Range: 3,400 ~ 24,000 BTU/h (0.4~7.1 kW)
Heating Nominal: 9,500 ~ 24,500 BTU/h (2.7~7.2 kW)
Heating Range: 3,000 ~ 24,500 BTU/h (0.8~7.2 kW)



IEWH

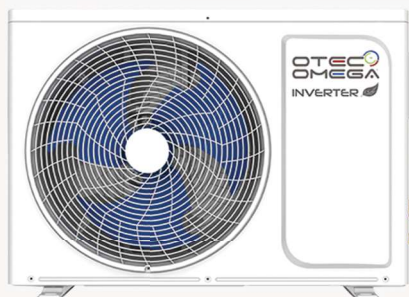

ICHH



Standard Wireless Controller

Notes:

- Nominal capacities are based on ARI standards 210/240-89, air entering the indoor coil operating at high fan speed for 220V setting.
Cooling: 80/67°F (27/19°C) DB/WB indoor & 95°F (35°C) outdoor ambient temperature.
- Ratings are based on indoor and outdoor connected by 25ft (7.5m) of tubing.
- Refrigerant metering device is installed at the outdoor unit as standard.
- Flare fittings are provided for connecting indoor and outdoor units.
- Insulation of both liquid and suction line is required.
- Outdoor units are shipped with full operating charge.
- For details of model number nomenclature, please refer to publication OGMNG-0520.



OMEGA
ENVIRONMENTAL
TECHNOLOGIES LLC.
17702 Mitchell North, #101
Irvine, CA 92614, USA
Tel: 714 795 2830
Fax: 714 966 1649
info@omegainverter.com
www.omegainverter.com

INVERTER

ISO 14001 ISO 9001

OTEC
AIR CONDITIONING
Showroom & Technology Center
11380 Interchange Circle North
Miramar, FL 33025 . USA
Tel: 305 731 2140, 888 840 7550
Fax: 954 212 8280
info@otecomega.com
www.otecomega.com